


## Gembird UPS-PC-652A UPS 650VA 390W sa stabilizatorom AVR

Šifra: 81641

Kategorija proizvoda: UPS I PRENAPONSKE ZAŠTITE

Proizvođač: GEMBIRD

**Cena: 5.670,00 rsd**

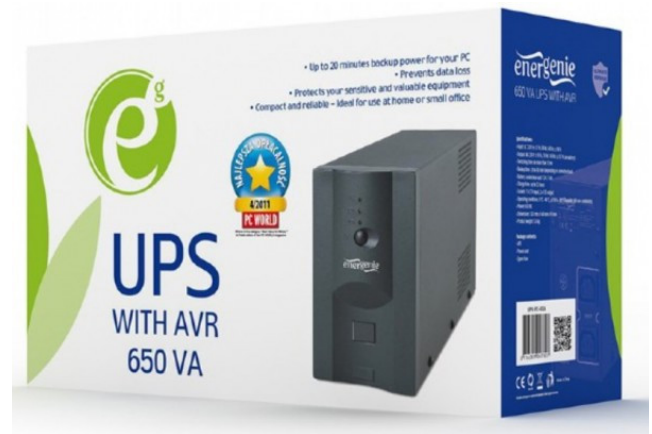

UPS  
with  
AVR,  
650  
VA

### ULTIMATE DEFENCE

Up to 20 minutes backup power for your PC

Prevents data loss

Protects your sensitive and valuable equipment

Compact and reliable - ideal for use at home or small office

Uninterruptable 650 VA power supply for PC's

Automatic AC voltage regulation (AVR)

Surge protected output sockets protect your equipment against harmful power surges, lightning strikes and short-circuits

Audible and visual alarms

LED status indication

Internal battery with overcharge and over-discharge protection

### Specifications

UPS type: line interactive

Input: AC 220 V  $\pm$  25 %, 50 Hz / 60 Hz  $\pm$  10 %

Output: AC 220 V  $\pm$  10 %, 50 Hz / 60 Hz  $\pm$  0.5 % (on battery)

Switching time: no more than 10 ms

Backup time: (8 to 20) min (depending on connected load)

Battery: sealed lead-acid 12 V / 7Ah

Charge time: up to 12 hours

Sockets: 1x C14 input, 2x C13 output

Operating conditions: 0°C to 40°C, at 10% to 90% humidity (RH non-condensing)

Power: 650 VA (390 W)

Dimensions: 320 mm x 160 mm x 95 mm

Product weight: 5.8 kg

### System requirements

In order to work correctly, the connected load should be at least 5% of the maximum capacity of the UPS.

For example, a 700 W UPS needs at least a connected load of 35 W to work.

ups mustek apc

^^

UPS with AVR, 650 VA

### ULTIMATE DEFENCE

Up to 20 minutes backup power for your PC

Prevents data loss

Protects your sensitive and valuable equipment

Compact and reliable - ideal for use at home or small office

Uninterruptable 650 VA power supply for PC's

Automatic AC voltage regulation (AVR)

Surge protected output sockets protect your equipment against harmful power surges, lightning strikes and short-circuits

Audible and visual alarms

LED status indication

Internal battery with overcharge and over-discharge protection

Specifications

UPS type: line interactive

Input: AC 220 V  $\pm$  25 %, 50 Hz / 60 Hz  $\pm$  10 %

Output: AC 220 V  $\pm$  10 %, 50 Hz / 60 Hz  $\pm$  0.5 % (on battery)

Switching time: no more than 10 ms

Backup time: (8 to 20) min (depending on connected load)

Battery: sealed lead-acid 12 V / 7Ah

Charge time: up to 12 hours

Sockets: 1x C14 input, 2x C13 output

Operating conditions: 0°C to 40°C, at 10% to 90% humidity (RH non-condensing)

Power: 650 VA (390 W)

Dimensions: 320 mm x 160 mm x 95 mm

Product weight: 5.8 kg

System requirements

In order to work correctly, the connected load should be at least 5% of the maximum capacity of the UPS.

For example, a 700 W UPS needs at least a connected load of 35 W to work.

ups mustek apc

^^