

Sandberg Power Station 72000mAh 421-22 PD100W/lamp

Šifra: 85215
 Kategorija proizvoda: DODATNA OPREMA ZA
 TELEFONE I TABLETE I SMART WATCH
 Proizvođač: SANDBERG

Cena: 27.970,00 rsd



Item no.: 421-22


EAN: 5705730421228

Sandberg DC Power Station 72000 is your mobile power hub, with a capacity of 72,000 mAh / 270 Wh. You get two powerful 100W USB-C PD ports, two USB-A QC3.0 ports with up to 22W, and a 12V DC output, so you can charge your laptop, tablet, phone, and much more. All five outputs can be used simultaneously! It comes with both male and female adapters for the car's 12V socket, so you can easily connect car equipment, a cooler, or a pump directly. Supports charging via both USB-C and solar panel (MPPT) through the DC input. With a built-in LED lamp, you're ready for anything from camping to power outages.

5 ports for simultaneous charging

Charges laptops, phones, coolers, more

Solar charging with MPPT supported

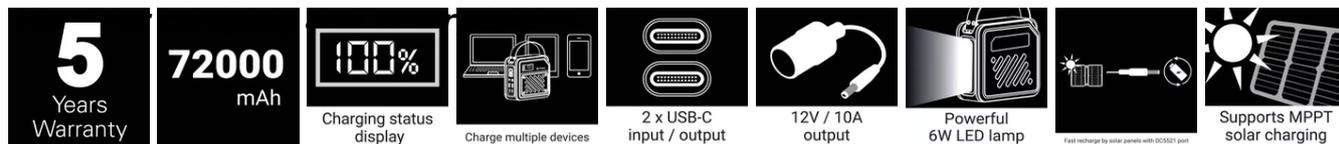

Battery capacity: 24 Ah @ 11.25V = 270 Wh / 72000 mAh @ 3.75V = 270 Wh

Lifecycle: 2000+ cycles to 80%

USB-C PD input 2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W max)

USB-C PD output 1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W max)

USB-A output 1: 5V/3A, 9V/2A, 12V/1.5A (18W max)

DC output: 9.6V-12.6V / 10A (DC5521)

LED light: Integrated 6W LED

Charge time: Approx. 3 hours with 100W PD charger (not included)

Supports pass-through charging with port-specific behavior:

If USB-C1 is being used for input, DC IN cannot be used simultaneously. Other ports work normally.

Battery type: LiMnFePO4 (LMFP)

USB-C PD input 1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W max)

DC input: 12V-26V / 100W (MPPT supported) (DC35135)

USB-C PD output 2: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A (100W max)

USB-A output 2: 5V/3A, 9V/2A, 12V/1.5A (18W max)

Max total output power: 268W

Weight: Approx. 2.3 kg

If power is being input via DC IN, then USB-C1 cannot be used for input or output at the same time. Other ports work normally.

If USB-C2 is used for input, USB-A2 can still provide output at the same time, up to 15W. Other ports work normally.

